

REF : CORD6ASxMSH

Patch cord 4 pairs RJ45 U/FTP – CATEGORIE 6A – 500 MHz - LSZH

Ed. 1.0






PRODUCT INFORMATION

Description

- Patch cord with moulded boots with separator U/FTP – 4 pairs – Category 6A – 500 MHz
- Each patch cord is delivery in individual polybag
- The patch cords are available in 5 lengths (1m – 2m – 3m – 5m – 10m)
- Colour code : EIA/TIA 568 B
- Plug FTP : RJ45 8P 8C for round cable – contact :15 µinch gold.
- The conductors are shifted on 2 levels to ensure a better cross talk (NEXT), a special separator serve to maintain the individual shielding up to the connector.

Code EIA/TIA 568 B




1	WHITE/ORANGE
2	ORANGE
3	WHITE /GREEN
4	BLUE
5	WHITE /BLUE
6	GREEN
7	WHITE /BROWN
8	BROWN

REF : CORD6ASxMSH

Patch cord 4 pairs RJ45 U/FTP – CATEGORY 6A – 500 MHz - LSZH

Ed. 1.0

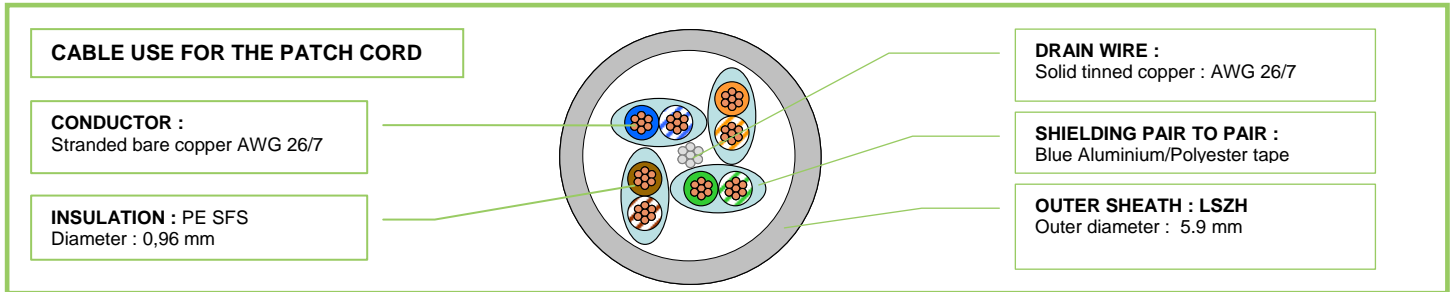

Standards / Performances

The performances of cable 555-xP4SH correspond to the limits defined by the standards following :

CABLE	SYSTEM
EIA/TIA 568.B.2-10 IEC 61156-5	EIA/TIA 568-B.2-10 Category 6A CHANNEL ISO 11801 Edition 2.1 – CLASSE EA CHANNEL EN 50173 Edition 2 – CLASSE E CHANNEL

Characteristics



Fire behaviour : IEC 60332-1 / NF C 32070 C2



Temperature range : - 20° C / + 70°C





Minimum bending radius : 8 x Outer diameter of cable



Conformity to RoHS directive

Product References

	COLOUR	LENGTHS	
CORD6ASxMSH	Grey	x = 1 / 2 / 3 / 5 / 10 m	Individual

x : lengths of patch cords : 1 m – 2m – 3 m – 5 m – 10 m